


FINELY-GROOM SEEDBEDS FROM HARD, STONY GROUND EASILY, & WITH LOW MAINTENANCE!




Affordable, low maintenance, quality landscaping tool for virtually any skid-steer loader. ROCKAWAY picks rocks in reverse, but can also push small amounts of dirt moving forward. Low profile makes visibility excellent!

You won't dump your bucket often. When you do, you'll dump mostly rocks.



ROCKAWAY BENEFITS

- Spiral-mounted teeth pull material toward the center, helping avoid dirt trails.
 - Low maintenance just two greaseable bearings and one #80 roller chain.
 - Easy to install on loader buckets and easy to remove just two pins and two hoses.
 - The same Rockaway can be used on several different buckets, if buckets are modified.
 - Takes up less trailer space than the competition.

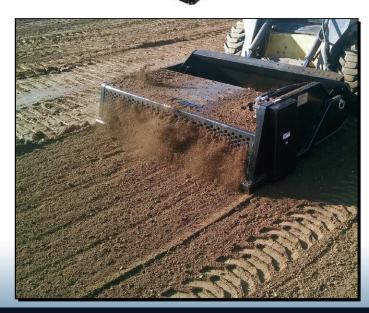



TESTIMONIALS

"My Rockaway took a little time to get used to; I was accustomed to dumping so much more often with my RockHound landscape rake." - a satisfied customer

"If all competitive rock pickers were the same price, the Rockaway would still be the one I would buy. Simple to operate, run longer before dumping, and you can grade with it." - Northern PA contractor "I could buy two Rockaway units for almost the same price as one RockHound landscape rake, with more room on my trailer; the Rockaway takes up less space." - MD contractor

"The Rockaway does as good a job as my Preparator™ landscape rake, and I can cover three times the territory before dumping. That saves time. When I do dump, there are more rocks and less dirt." - Western PA contractor

NEW SUPER DUTY IMPROVEMENTS

A rubber protecting flap now hangs 8" to 10" into the bucket.



The rotor shaft has been enlarged from 1 1/4" in diameter to 1 3/8" diameter with heavier



duty, 1 3/8" bearings. Rotor has been redesigned with a bolted hub for easy service.



New larger #80 drive sprockets & chain increased from #60 for added strength & longevity.

New, stronger hood design with slotted holes. The center area is now solid steel to reduce dust and add strength. Hoses are now covered with protective material.



Tube frame has been increased 50% from 1/8" to 3/16", heavier for durability.

A front push bar 3/8" thick has been added to increase strength and provide a wear area when pushing soil forward.

3/16" Stainless steel wear runners have been added to the bottom of both sides of the frame.

ROCKAWAY SPECIFICATIONS

<u>NUGNAWAI SPEGIFIGATIONS</u>		
	MODEL 7415SD SUPER DUTY	MODEL 8415SD SUPER DUTY
Bucket Widths	68" - 73.5 (1.73m-1.87m)	78" - 83.5 (1.98m-2.12m)
Companion Bucket	74CB	84CB
Dimensions		
Working Width	73" (1.85m)	84" (2.13m)
Overall Width	79.5" (1.84m)	88" (2.24m)
Overall Length	46.5" (1.18m)	46.5" (1.18m)
Overall Height	21.5" (.55m)	21.5" (.55m)
Rotor		
Diameter (Overall)	12.5" (3,175mm)	12.5" (3,175mm)
Replaceable Teeth	Durable Hardox Śteel	Durable Hardox Śteel
Number of Teeth	74, in Spiral Pattern	84, in Spiral Pattern
Hydraulic Motor		
Flow Required	12-20 GPM (45.4-75.7 LPM)	12-20 GPM (45.4-75.7 LPM)
Maximum Pressure	3,200 PSI (316.6 N.m)	3,200 PSI (316.6 N.m)
Drive		
Chain	#80	#80
Weights		
Working	415 Lb. (118.2kg)	445 Lb. (188.2kg)
Shipping	570 Lbs. (258.5kg)	600 Lbs. (272.2kg)
Specifications are subject to change without notice.		